

Beam Induced Depolarization in the HERMES Transversely Polarized Hydrogen Target

D. Reggiani

University of Erlangen


HERMES Collaboration, DESY - Hamburg

Outline:

- The HERMES Target
- The Transverse Magnet Design
- Beam Induced Depolarization Measurements
- Summary




The HERMES Polarized Target

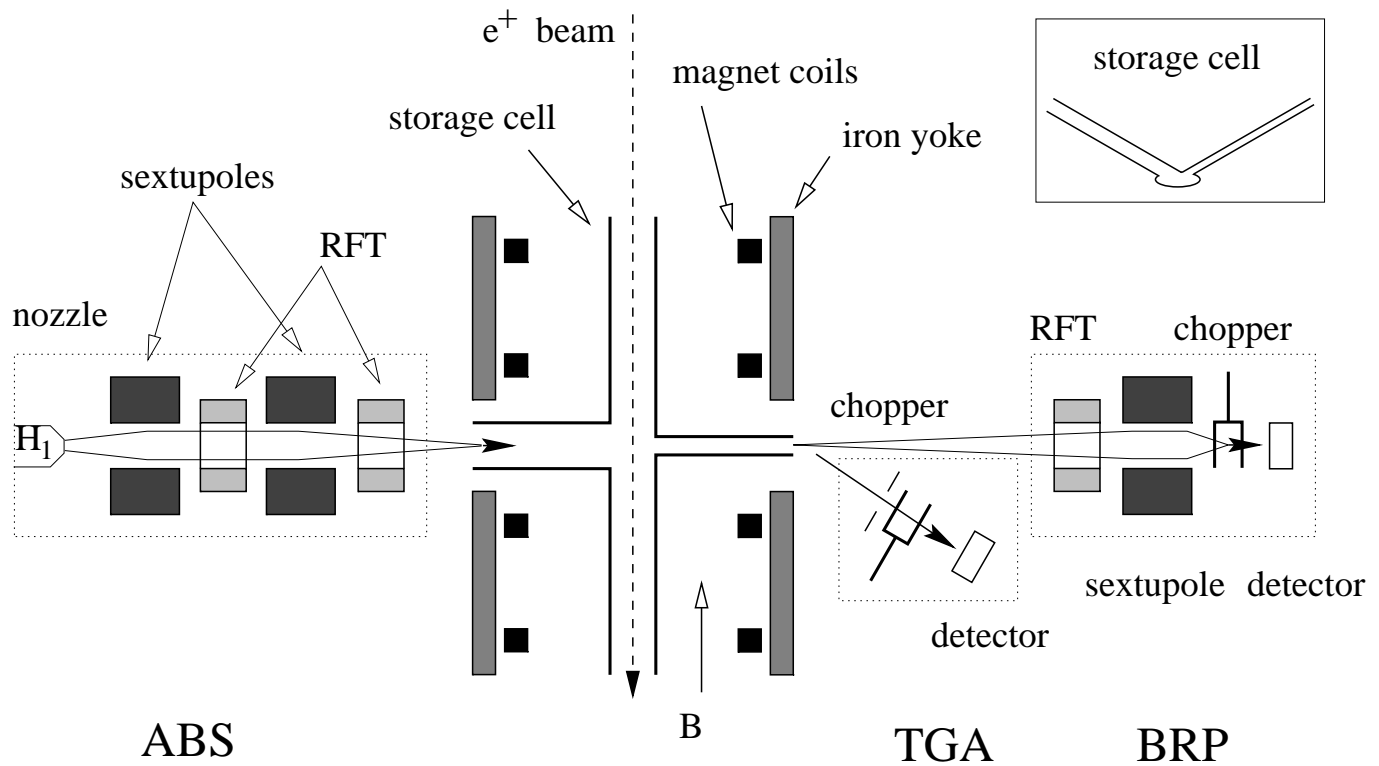

- 1996 - 2000: Longitudinal Polarization (Hydrogen/Deuterium)
- Since 2002: Transverse Polarization (Hydrogen)

The Atomic Beam Source (ABS)

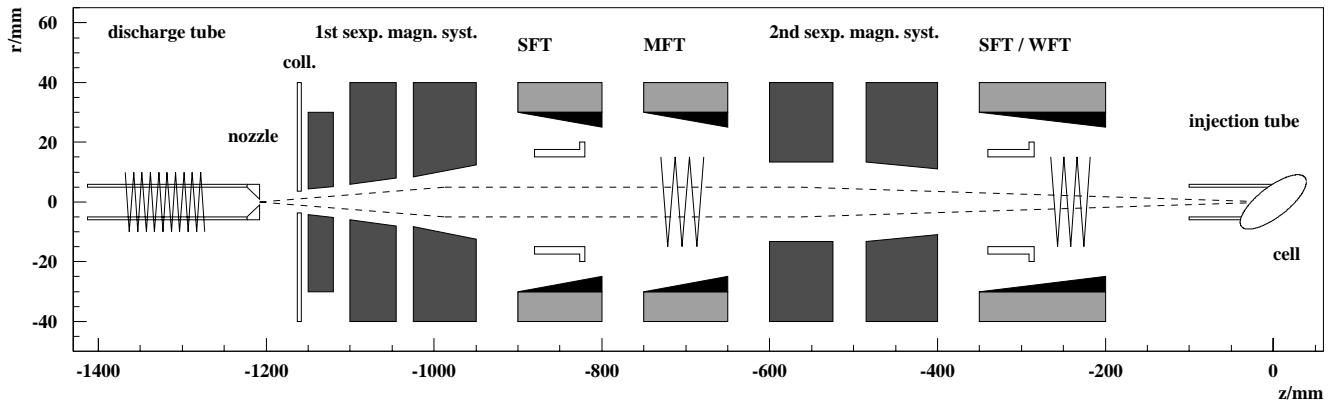


- **Dissociator:** from molecules to atoms
 - Air-cooled RF dissociator with $\approx 85\%$ degree of dissociation at 90 sccm
 - Small amount of O_2 (0.15 sccm) improves discharge properties
- **Sextupole System:** focus atoms with $m_s = +\frac{1}{2}$
 - 5 (tapered) magnets in a 3 magnet and a 2 magnet subsystem
- **RF Transitions:** HF states occupation exchange

Two injected hyperfine states during data taking

Example: Hydrogen Nuclear Polarization P_z+

$$\begin{pmatrix} n_1 \\ n_2 \\ n_3 \\ n_4 \end{pmatrix} \xrightarrow{6pole} \begin{pmatrix} n_1 \\ n_2 \\ 0 \\ 0 \end{pmatrix} \xrightarrow{SFT\ 2-4} \begin{pmatrix} n_1 \\ 0 \\ 0 \\ n_2 \end{pmatrix}$$


The Breit-Rabi Polarimeter (BRP)

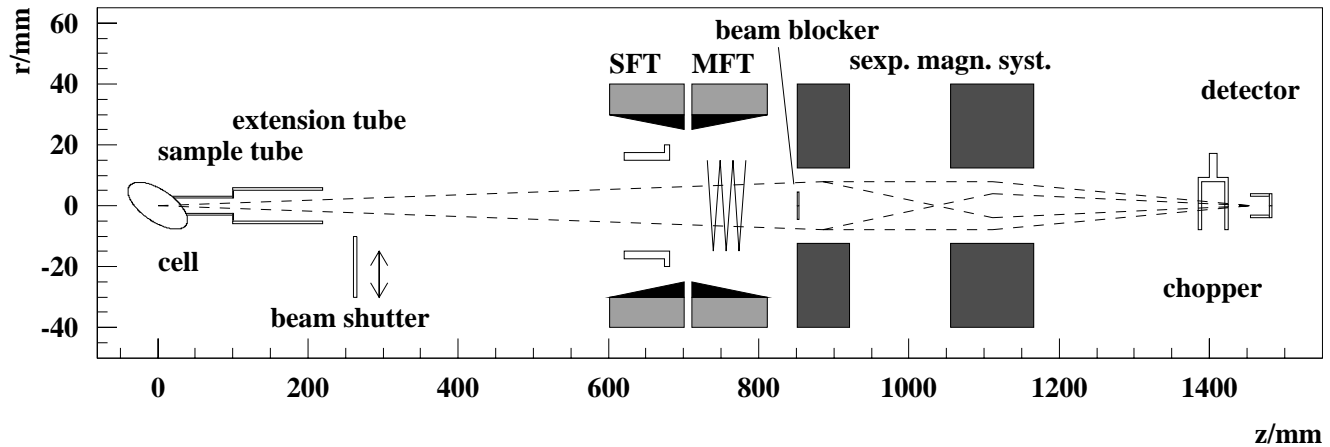

- **Task**
 - Measure the polarization of sample beam
- **Measurement**
 - Use of chopper to subtract background
 - Measurements with different HFT modes:
 - ⇒ linear equations system, solution for N_i
- **Calibration**
 - $N_{\text{sig}} > N_{\text{hfs}} \Rightarrow$ system overdetermined
 - ⇒ RFT efficiencies can be measured
- **Performance**
 - Minimum time for polarization measurement ≈ 30 s
 - Statistical uncertainty < 0.005
 - Systematic uncertainty ≤ 0.01

Transverse Target: the Basic Idea

From July 2001 → Transverse Polarized Target (H)

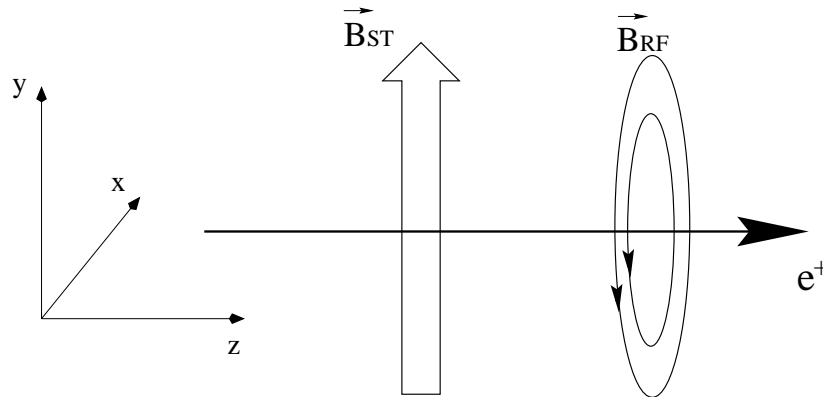


New Target Holding Field

Drawbacks and Solutions:

- Bending of the electron beam:
Orbit compensation
- Synchrotron radiation emission:
Avoid the spectrometer acceptance
- Possible beam induced nuclear depolarization:
Conceive a holding field which minimizes this effect

The Magnet Design


- Conventional static vertical dipole
- $B_T > 280$ mT to inhibit spin relaxation

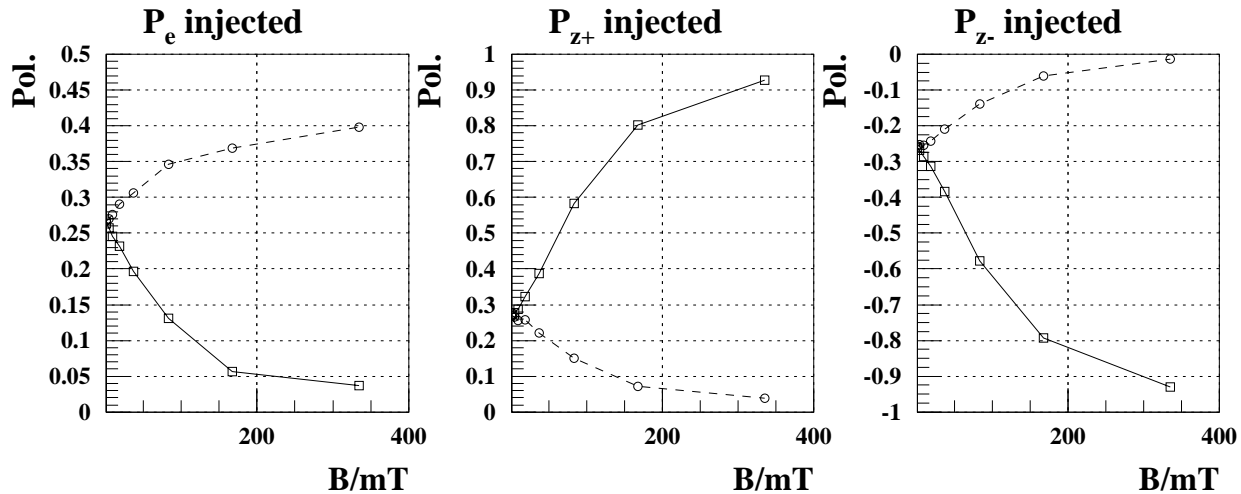


- $B_T < 400$ mT to minimize synchrotron radiation
- $\Delta B < 0.15$ mT overall the cell region ($400 * 20 * 10$ mm), to avoid beam induced depolarization
- Dimensional constraints:
 - pole length < 650 mm
 - pole width < 200 mm

The Effects on the HERA Beam

Bending ($B_T = 340$ mT):

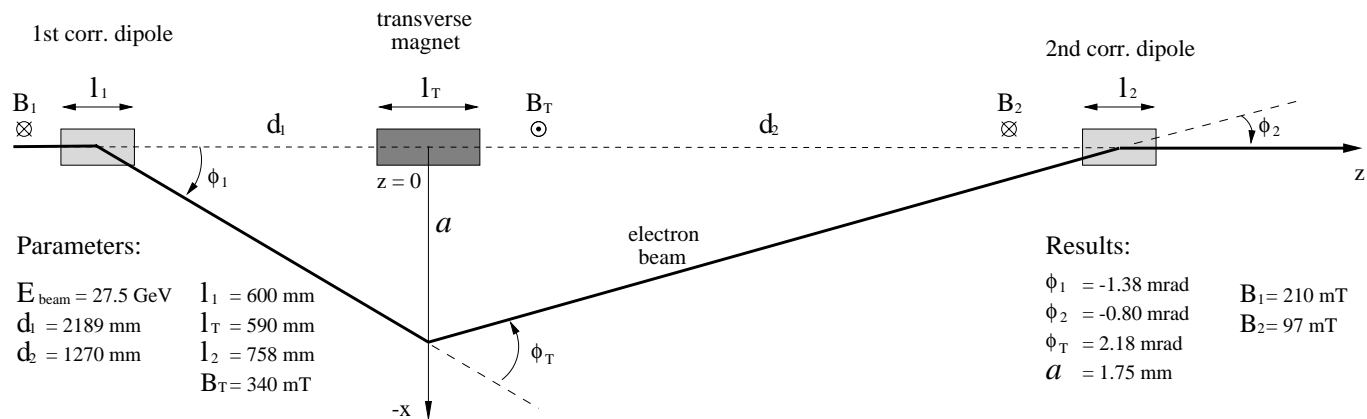


Synchrotron radiation ($B_T = 340$ mT):

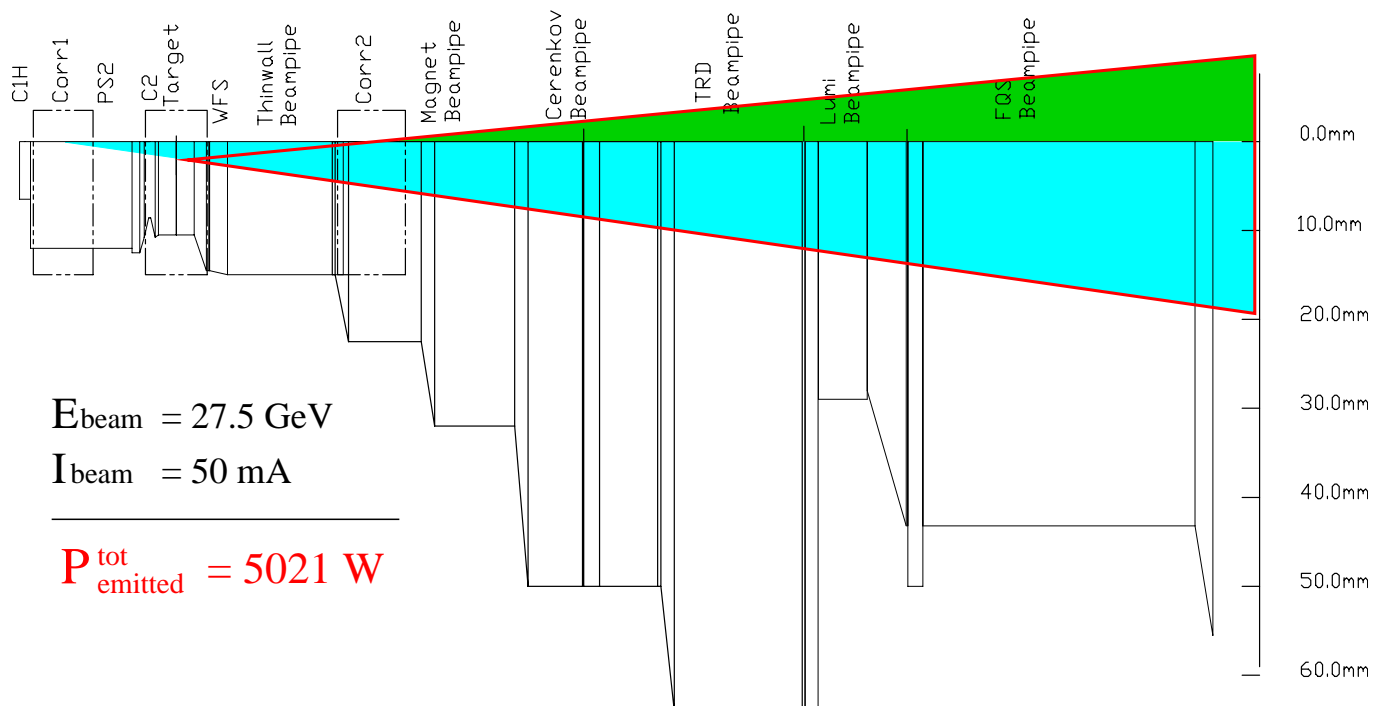


Depolarization by Beam Interaction

HERA e-beam structure:

- 220 Bunches
- Spacing: $\Delta t = 96 \text{ ns}$
- Bunch width: $\sigma_t = 37.7 \text{ ps}$

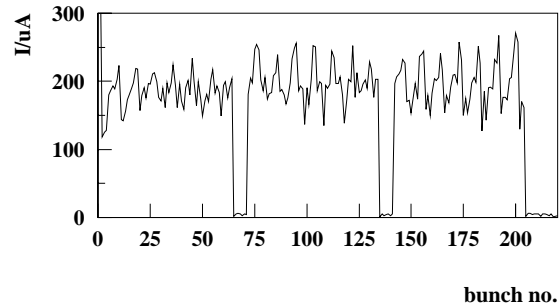

Fourier Analysis of the electron bunch:

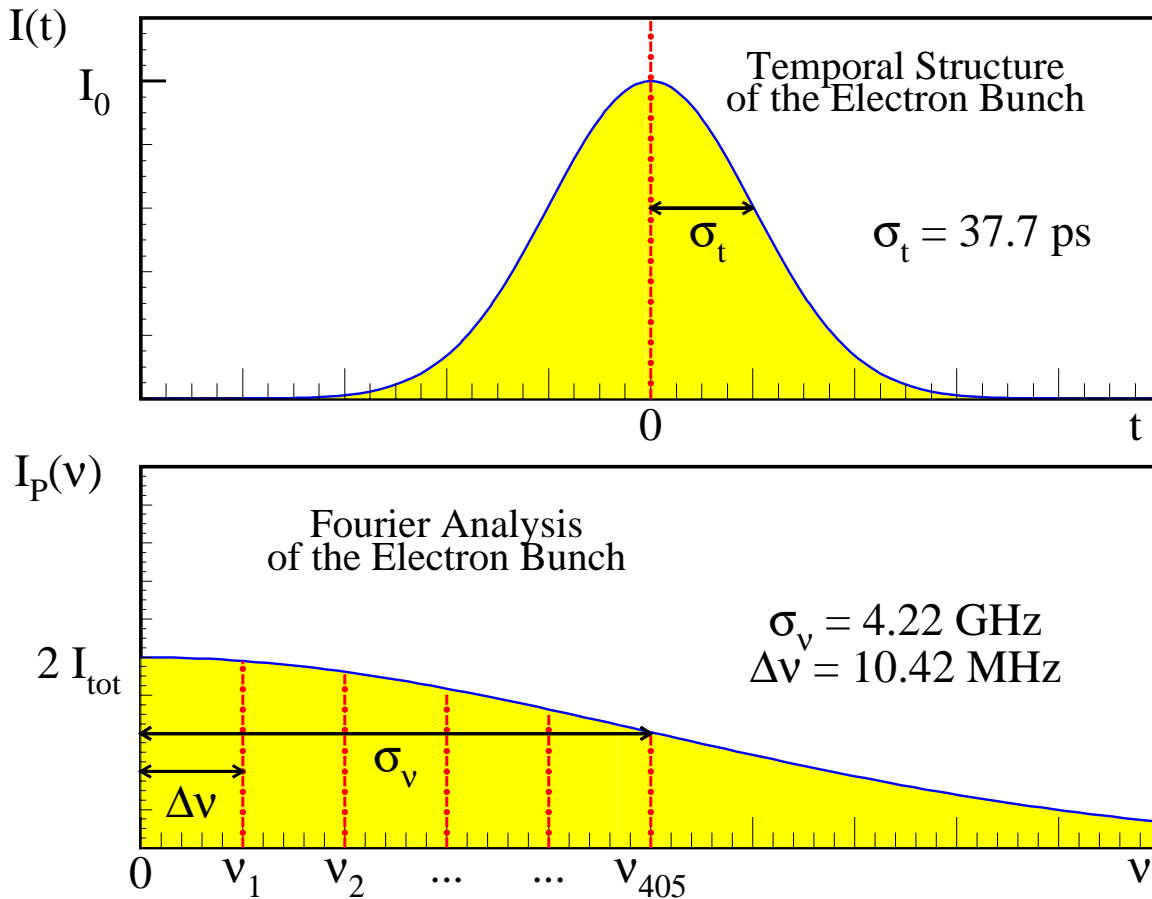


Resonance Conditions: $\frac{|E_i - E_f|}{h} = \nu_n \quad n = 1, 2, \dots$

\Rightarrow Depolarization!

Resonance Conditions (Nucl. Trans.)

$$|E_i - E_f|/h = \nu_n \quad n = 1, 2, \dots$$

But... ΔE_{if} depends on B_{ST} !

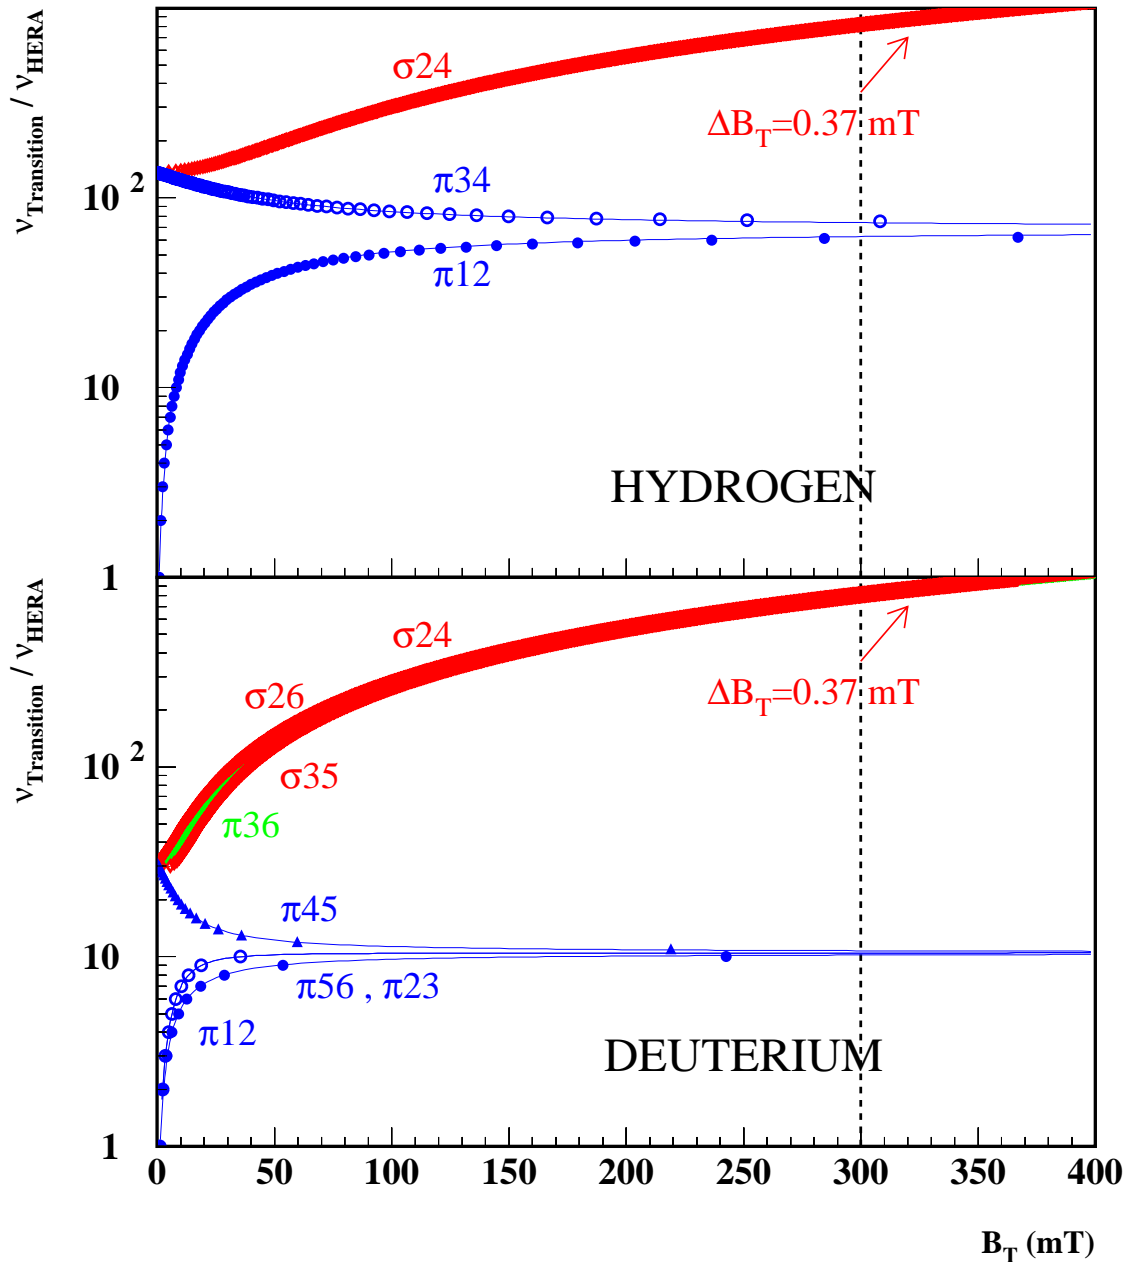

- π -transitions ($B_{ST} \perp B_{RF}$) \Rightarrow Long. & Trans. Target
- σ -transitions ($B_{ST} \parallel B_{RF}$) \Rightarrow Trans. Target Only!




Relative Transition Probabilities


$$W_{if} \propto B_{RF}^2 \cdot |V_{if}|^2 \cdot \tau^2$$

- B_{RF} depends on the harmonic number
- The harmonic number depends on B_{ST}

Fixing τ and evaluating $|V_{if}|^2 \Rightarrow W_{if}$ vs B_{ST} :

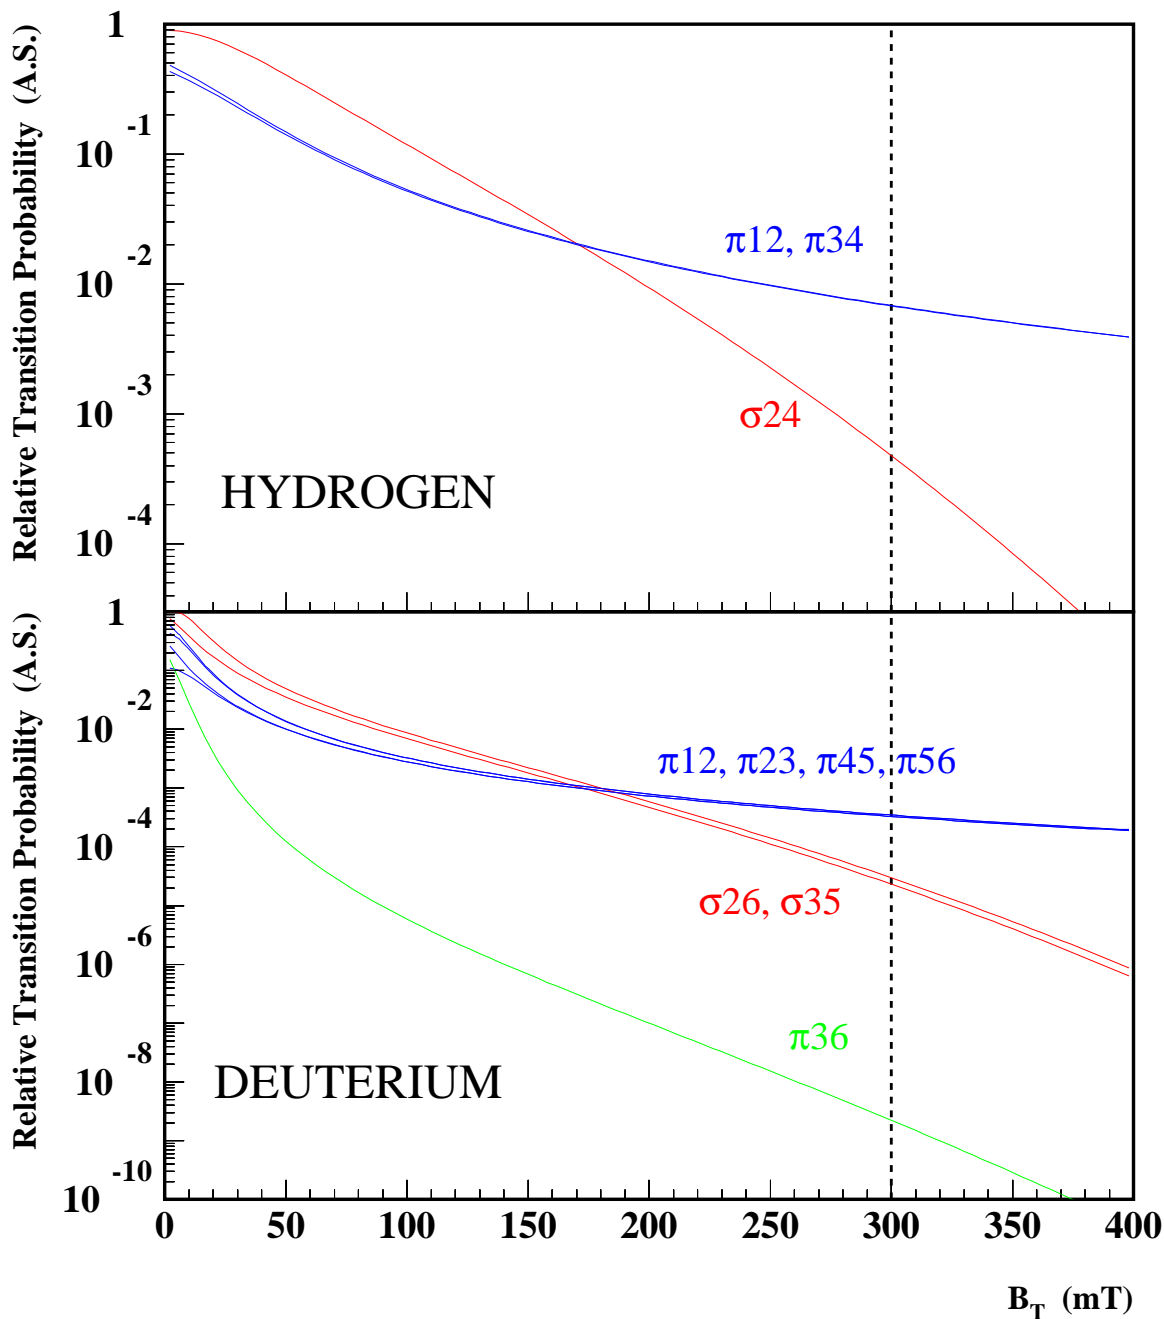

The Transverse Magnet

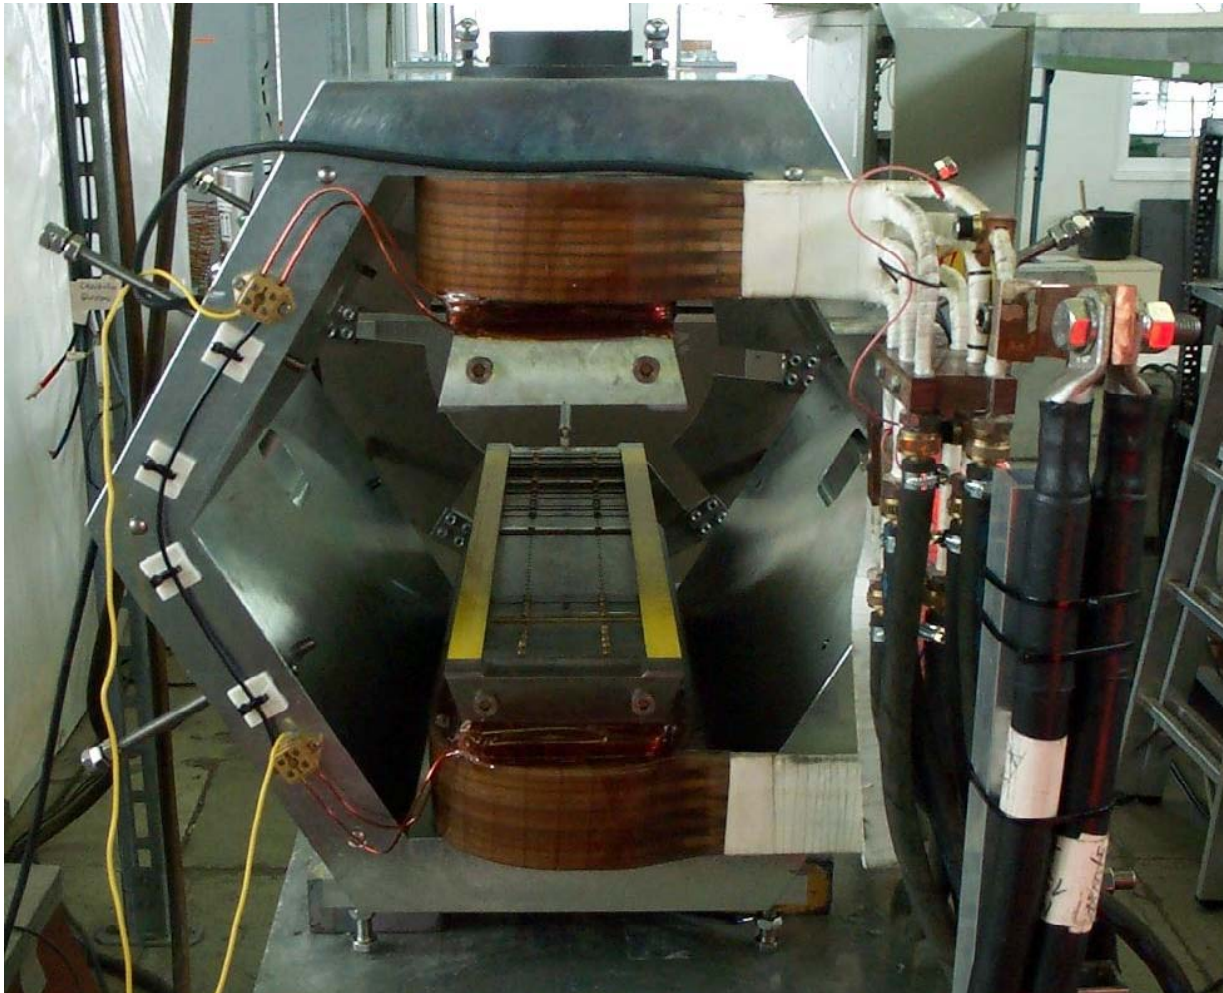


- Field intensity: $B_T = 297 \text{ mT} @ 545 \text{ A}$
- Field uniformity:
 - ΔB along z : 0.05 mT
 - ΔB along y : 0.18 mT
 - ΔB along x : 0.7 mT

⇒ additional correction coils needed!!!

σ Reson. Measurements

• Spin-Flip Measurement


- Beam Current = 20 mA
- State $|4\rangle$ injected (ABS)
- Target Field scanned around the working point (297 mT)
- Fast detection of states $|1\rangle$ and $|2\rangle$ (BRP)
- Possible Beam-Induced Resonances:
 - * $\sigma |2\rangle \leftrightarrow |4\rangle$ (elec. and nuclear, 0.37 mT)
 - * $\pi |1\rangle \leftrightarrow |4\rangle$ (electron, 0.37 mT)

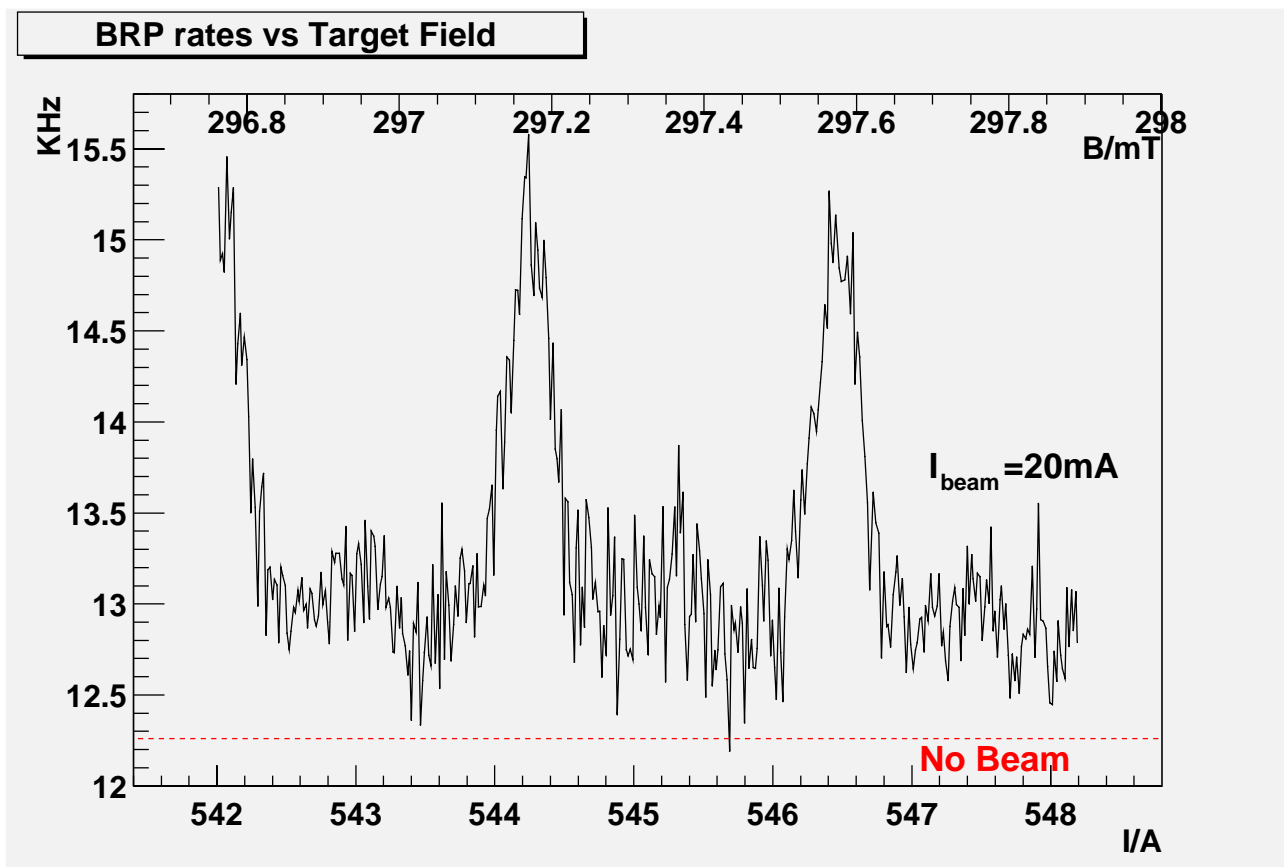

Cell-Embodiment Correction Coils

Since March 2004


- **Aim**
Improve \times non-uniformity from 0.7 mT to 0.2 mT
- **Technique**
Correction Coils built in the Cell Support Structure

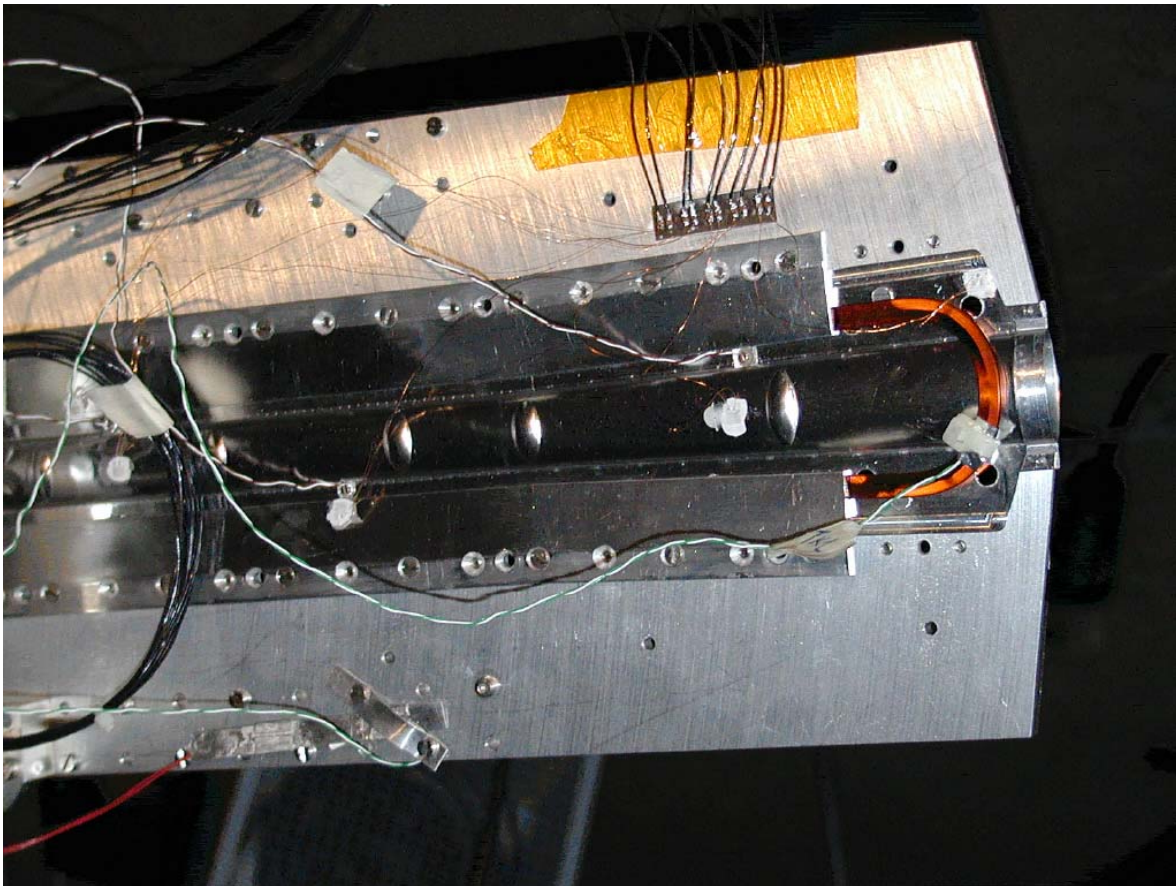

- **Field Strength** $\approx 0.4 \text{ mT}$ along the cell axis
- **Current** $\approx 60 \text{ A}$
- **Cooling** from cell's helium cryo system

σ Reson. Measurements with Correction Coils

- Spin-Flip Meas. with and without Correction Coils
 - Beam Current ≈ 30 mA
 - State $|4\rangle$ injected (ABS)
 - Target Field scanned around the working point (297 mT)
 - Fast detection of states $|1\rangle$ and $|2\rangle$ (BRP)
 - Correction Coils change Shape of Resonance

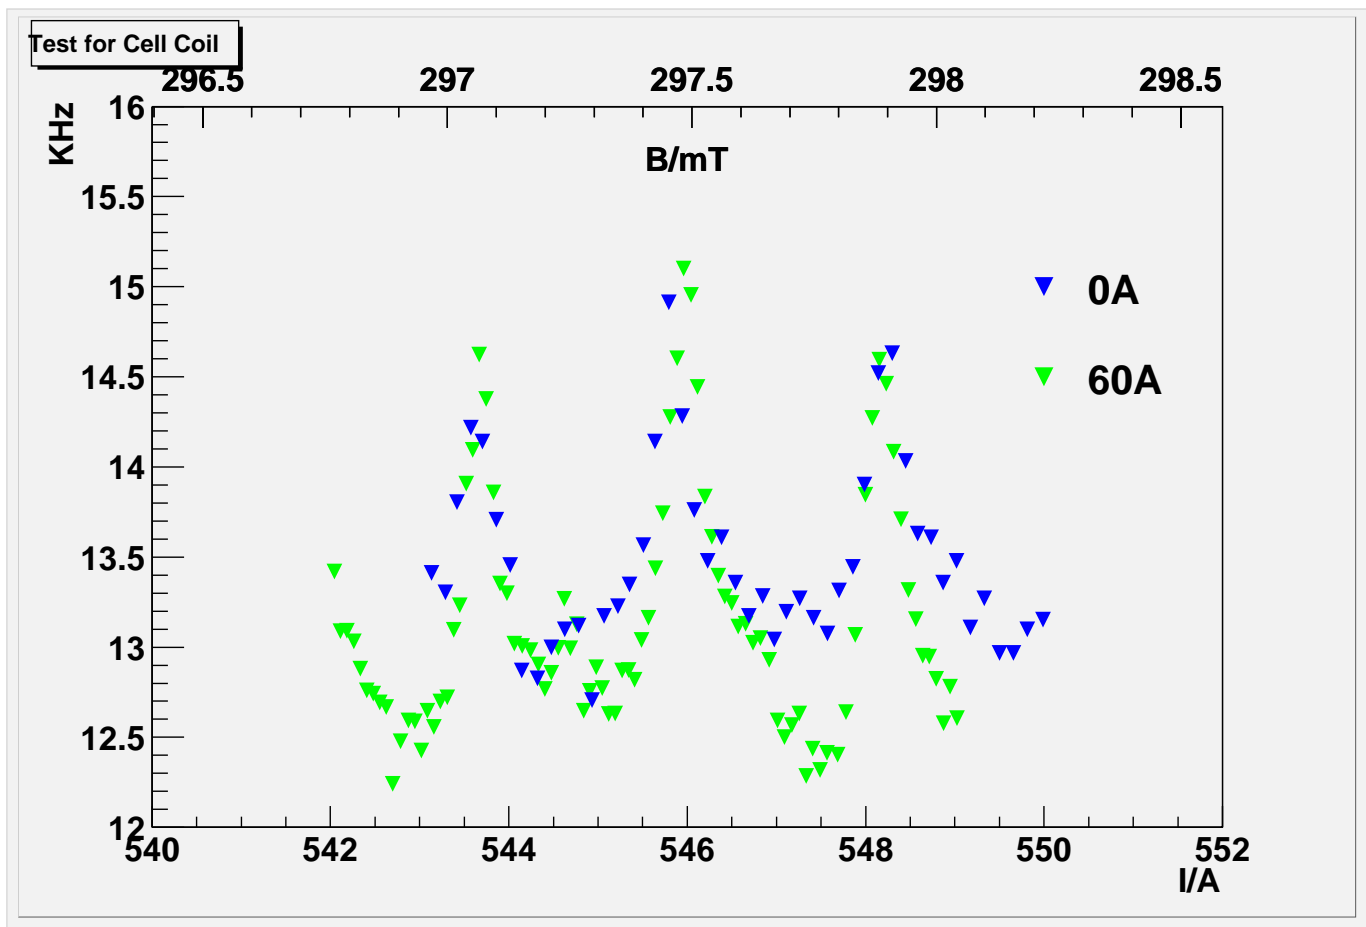


Correction Coils improve the Target Performance!



Polarization Measurement

- Polarization Measurement with Correction Coils
 - Beam Current ≈ 30 mA
 - Target Field scanned around the working point (297 mT)
 - $\Delta P \approx 2.5$ %

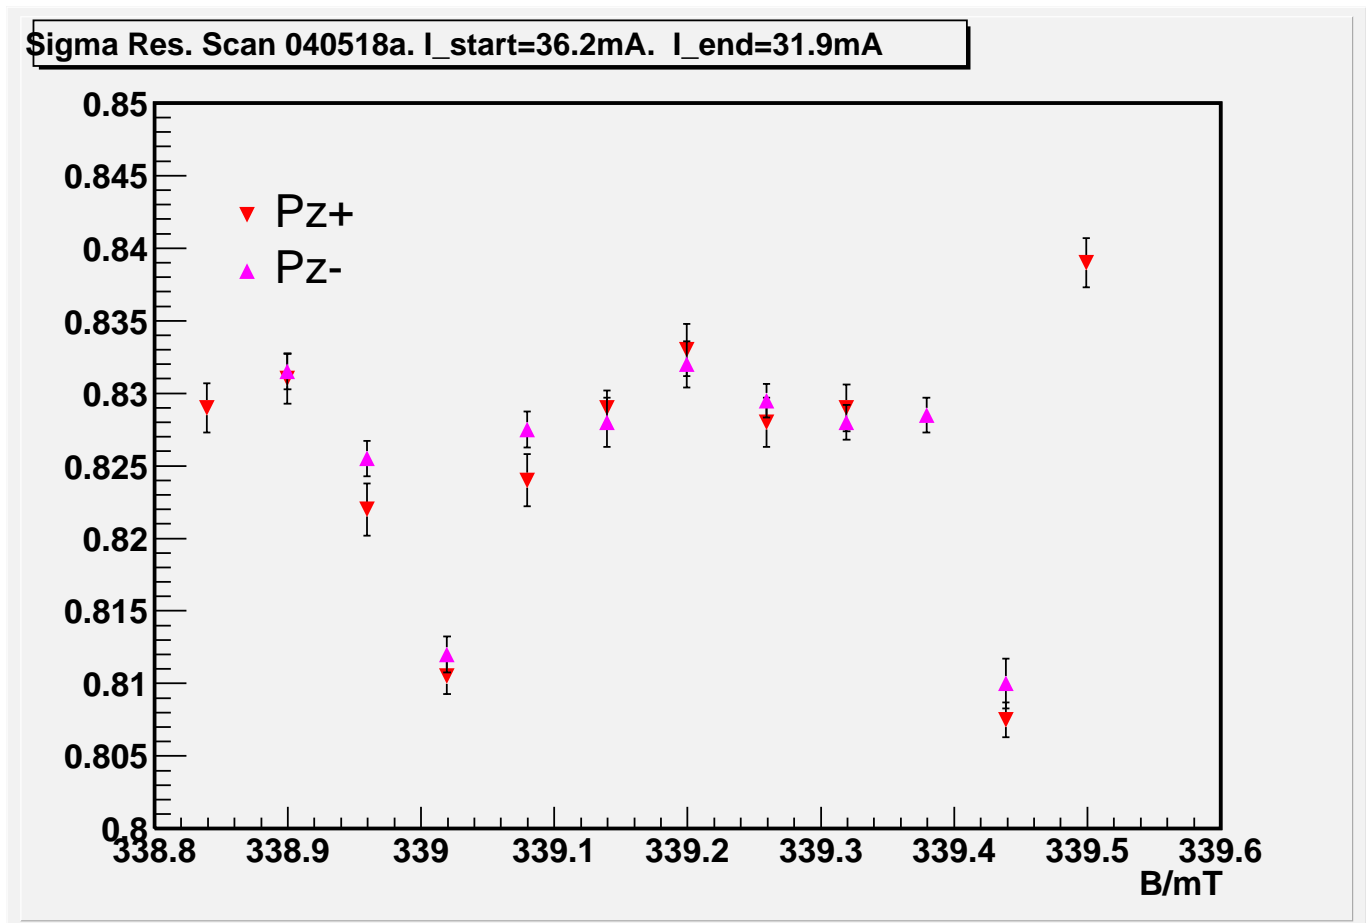

Working Field Tuning

Summary

- Hydrogen Transversely Polarized Gas Target running at HERMES
- Average Polarization in 2002/03:
 $P^T = 0.795 \pm 0.033$
- Beam Induced Depolarization @ $I_{beam} \leq 28$ mA:
 $\Delta P^T \leq 1.5 \%$
- Beam-induced Densely Spaced (0.37 mT) Depolarizing Resonances measured with the Breit-Rabi Polarimeter
- Since 2004:
Improved Target Field Quality thanks to Cell built-in Correction Coils